


SERIES CM

Portable Transformer panels

Features

- Metal trolleys with supporting frame in plates 20/10 mm with panels to support the components in PVC thickness 10 mm, eyebolts for the lifting and rubberized wheels.
- Covers in unbreakable transparent polycarbonate with spring closure for modular switches.
- Access with plug CEE P17 IP67
- Distribution with sockets CEE P17 IP67.
- General thermomagnetic-differential circuit breaker, sockets protected by thermomagnetics.
- Protection degree IP44 to be advanced.
- Manufactured according the regulations CEI 17-13/1 EN 60439-1.
- Transformers manufactured according the regulations CEI EN 61558-1, 61558-2-4, 61558-2-6.

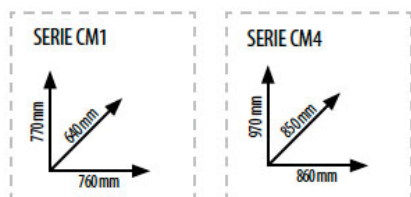

series CM	Transformer	Sockets CEE P17						
		63A	32A	16A	32A	16A	32A	16A
Item		3P+N+E 	3P+N+E 	2P+E 230V 	2P 48V 	2P 48V 	2P 24V 	2P 24V 
CM16KSPS	Single phase for safety 6KVA 400/24-48V				3			3
CM112KSPS	Threephase for safety 12KVA 400/24-48V				3			6
CM425KIPS	Threephase for insulation 25KVA 400/400V		1					
CM545KIPS	Threephase for insulation 45KVA 400/400V	1						

N.B. Further combinations are possible on request. Other dimensions from the standard ones are subject to the type of set up.