

ULTRA SAFE 2

ATEX LED FLOODLIGHT RECHARGEABLE



Features

- Robust LED spotlight with 81 LEDs
- Width, uniform illumination
- High light output (3200 Lm), with long duration
- Plastic housing, impact resistant, antistatic
- Front cover: reinforced glas
- Positionable horizontally or vertically
- Protection category IP65
- LiPo battery 51,2 Ah rechargeable
- Weight only 6,0 kg.

Specifications

- Illuminant: 81 x Power LEDs
- Power: 35W
- Luminous flux: ca. 3200 Lumen / 5000 K
- Run time: ca. 8h
- Charging time: ca. 10h.
- Battery: LiPo 51,2 Ah Accu, rechargeable
- Charging unit: 230V (Non-ATEX)
- Temperature range: -20°C to +45°C
- Dimensions: 388 x 319 x 147 mm.
- ATEX Identification: II 2 G Ex ib IIC T4 Gb / II 2 D Ex ib IIIC T135° Db




The explosion-proof, rechargeable ULTRA Safe 2 LED LED spotlight combines high light output with long illumination time. Thanks to his low weight yet extraordinary ruggedness makes it the ideal lighting solution in demanding and harsh environments where mobile light is required. The spotlight can be set up flexibly horizontally or vertically. Optional accessories such as telescope stand or Magnetic fastening round off the possible applications.

Type	Battery	Power	Item
ULTRA 2 LED	LiPo 51,2 Ah	35W	290794

OPTIONS

Ex-magnet bracket consisting of 2 x magnets incl. holder
Item 290763

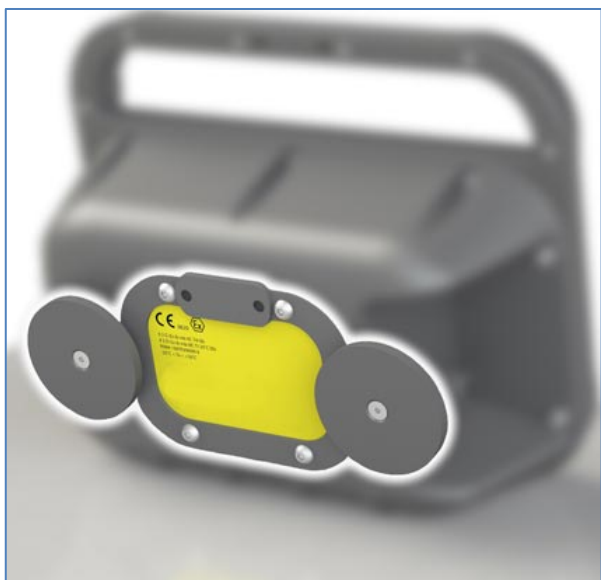

Ex-subframe to direct lamp in all positions
Item 290765

