

KE-LED-EX 4006 Armatur

ATEX LED TUBE LUMINAIRE




Features

- Illuminant: 6 POWER LED / 6500K
- Protection tube: polycarbonate, shock-resistant, 40 mm Ø
- End cap: aluminium, black anodized
- Fixation: incl. 2 fixing clamps made of plastic
- Protection category: IP68 -50m/5h
- Protection class: II / III
- Cable: 10 m H07BQ-F 2 x 1,50 mm²
- Voltage: 230V / 110V / 42V / 24V / 12V
- Special requests - as covered by our Ex-certification - can be fulfilled




Specifications

- Illuminant: 6 x Power LEDs
- Power: 6W
- Luminous flux: ca. 700 Lumen
- Voltage/Ampere: 230V / 110V / 42V / 24V / 12V
- Frequency range: 50-60Hz
- Protective tube: polycarbonate, 40mm Ø
- Diffusor: without (on request)
- End cap: aluminium, anodized
- Fixing clamps: 2 pieces included
- Cable: 10m. H07BQ-F 2x1,5 mm²
- Plug: without (ATEX plug on request)
- Protection (IP): IP68 – 50m. / 5h.
- Protective class: II / III
- Length/Weight: 495 mm / 1,66 Kg.
- Temperature range: -20°C - +50°C
- Zones; 1, 2, 21, 22
- ATEX Identification: II 2 G Ex eb mb op is IIC T4 Gb
- II 2 D Ex tb op is IIC T105° Db IP68
- ATEX number: TÜV 18 ATEX 8184

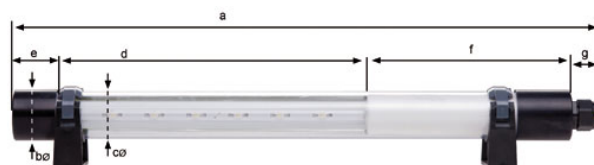

Type	Dimensions in mm						
	a	b	c	d	e	f	g
KE-LED-EX 4006/... fixture	495	43	40	225	35	170	25



FIXING CLAMP D40 EX

Type	Dimensions in mm					
	a	b	c	d	e	f
BFK D40 EX	67	25	20	40,4	57	1x

The explosion-proof ATEX LED tube light is ideal for installation in machines, vehicles and devices of all types, where safety is required with regard to explosion protection. Optimum and bright illumination of the workspaces is guaranteed by six integrated POWER LED modules. The mounting brackets are included in the scope of delivery ensure easy assembly.

ARTICLE

Type	Voltage	Amp.	Weight	Item
KE-LED-EX 4006/230 fixture	230V AC	0,05A	1,66 Kg.	146100
KE-LED-EX 4006/110 fixture	110V AC/DC	0,05A	1,66 Kg	146110
KE-LED-EX 4006/42 fixture	42V AC/DC	0,14A	1,66 Kg	146120
KE-LED-EX 4006/24 fixture	24V AC/DC	0,20A	1,66 Kg	146130
KE-LED-EX 4006/12 fixture	12V AC/DC	0,33A	1,66 Kg	146140