

KE-LED-EX 5024 Armatur

ATEX LED TUBE LUMINAIRE




Features

- Illuminant: 24 POWER LED / 6500K
- Protection tube: polycarbonate, shock-resistant, 50 mm Ø
- End cap: aluminium, black anodized
- Fixation: incl. 2 fixing clamps made of plastic
- Protection category: IP68 -50m/5h
- Protection class: II / III
- Cable: 10 m H07BQ-F 2 x 1,50 mm²
- Voltage: 230V / 110V / 42V / 24V / 12V
- Special requests - as covered by our Ex-certification - can be fulfilled




Specifications

- Illuminant: 24 x Power LEDs
- Power: 15W
- Luminous flux: ca. 2400 Lumen
- Voltage/Ampere: 230V / 110V / 24V
- Frequency range: 50-60Hz
- Protective tube: polycarbonate, 50mm Ø
- Diffusor: integrated
- End cap: aluminium, anodized
- Fixing clamps: 2 pieces included
- Cable: 10m. H07BQ-F 2x1,5 mm²
- Plug: without (ATEX plug on request)
- Protection (IP): IP68 – 50m. / 5h.
- Protective class: II / III
- Length/Weight: 770 mm / 2,2 Kg.
- Temperature range: -20°C - +40°C
- Zones; 1, 2, 21, 22
- ATEX Identification: II 2 G Ex eb mb op is IIC T4 Gb
- II 2 D Ex tb op is IIIC T105° Db IP68
- ATEX number: TÜV 18 ATEX 8191 X

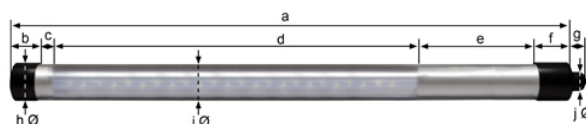

Dimensions in mm										
Type	a	b	c	d	e	f	g	h	i	j
KE-LED-EX 5024/... fixture	770	35	25	500	165	45	25	53	50	25



FIXING CLAMP D50 EX

Dimensions in mm						
Type	a	b	c	d	e	f
BFK D50 EX	75	30	20	50,5	69	1x

The new, luminous intensive ATEX LED tube lamp KE-LED-EX 5024 supports you with extremely bright and glare-free light when working in explosive areas. It is ideally suited for permanent lighting of plants or buildings with special and extreme requirements. Optionally the luminaire is available with a through wiring to connect several luminaires to each other. Thanks to the included mounting brackets, quick and easy assembly is ensured.

ARTICLE

Type	Voltage	Amp.	Weight	Item
KE-LED-EX 5024/230 fixture	230V AC	0,075A	2,2 Kg.	148100
KE-LED-EX 5024/110 fixture	110V AC/DC	0,135A	2,2 Kg	148110
KE-LED-EX 5024/24 fixture	24V AC/DC	0,55A	2,2 Kg	148130