

Cuadros Portátiles de Distribución



Caucho - LLDPE Flightcase - Enrolladores



Soluciones móviles de distribución eléctrica e iluminación LED para aplicaciones industriales y zonas ATEX

Solutions with hard butyl rubber enclosures

Butyl rubber is the sign that distinguishes the electric distributions made by Gimax.

The company has always been oriented towards the search for the highest quality standards and has become since the 80s a true pioneer in the molding of this material.

Since the beginning of its activity Gimax has decided to offer a wide choice: standard and customized solutions exploiting the chemical-physical characteristics of the rubber, ideal material for electrical use. Thanks to the continuous and constant collaboration with

special chemical laboratories, Gimax has succeeded in developing a mixture that improves the already excellent basic characteristics of the product.

For this reason Gimax panels are resistant to oils, acids, gasoline and industrial solvents, as well as presenting exceptional resistance to aging. Great attention has been paid to the search for one self-extinguishing compound (Glow wire test 960 ° C) with low smokes toxicity to guarantee safety even in closed environments such as theaters, cinemas, entertainment environments, installations sports,

subways, etc.).


Gimax products are appreciated in all industrial environments characterized by wear and tear of the product such as:

- Show business
- Building sites
- Industrial maintenance
- Defence
- Civil protection



SOLUTIONS FOR ANY USE

Gimax offers a very wide choice as standard and bespoke solutions.
Our rubber combinations are used in all industrial environments.
Please trust us, we'll find a solution... together.
Custom solutions available on demand

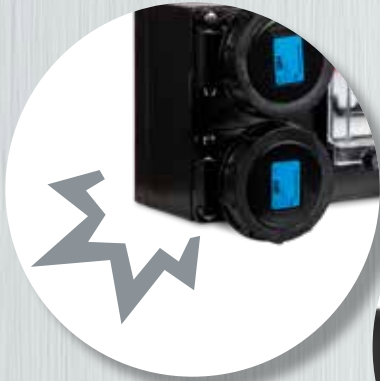

SHOCK RESISTANT



PORTABLE



MODULAR



FLIGHT CASE

TROLLEY



Series PIRAMIDE

POWER DISTRIBUTION BOXES



Product features

- **Hard butyl rubber** enclosures, double insulation
- Available with CEE receptacles IP44, IP67 black color and/or Socapex connectors
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptacles		
			32A		
			3P+N+E 	3P+E 	2P+E 
PID2P32N	Plug 230V 32A 3P IP44	N.A.			2 (IP44)

Dimensions: 130 x 100 x 130 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E 	3P+E 	2P+E 
PID3P16N	Plug 230V 16A 3P IP44	N.A.			3 (IP44)

Dimensions: 130 x 100 x 130 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	Connectors		
			Socapex		
				19P 	
PID2SX	Socapex male 19 pin	N.A.		2	

Dimensions: 130 x 100 x 130 mm (L x H x W)
Custom solutions available on demand

Series CENTOBUCHI

POWER DISTRIBUTION BOXES



Product features

- **Hard butyl rubber** enclosures, double insulation
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Available with CEE receptacles IP44, IP67 black color and/or Socapex connectors
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E 	3P+E 	2P+E 
PRD166P16N	Plug 230V 16A 3P IP44	N.A.			6 (IP44)

Dimensions: 230 x 130 x 70 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E 	3P+E 	2P+E 
PRD167P16N	Plug 230V 16A 3P IP44	N.A.			6 + 1 through wiring (IP44)

Dimensions: 230 x 130 x 70 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E 	3P+E 	2P+E 
	Plug 230V 32A 3P IP67	MCB 1P+N 16A			4 (IP44)

Dimensions: 230 x 130 x 70 mm (L x H x W)
Custom solutions available on demand

Series RETTANGOLO

POWER DISTRIBUTION BOXES



Product features

- **Hard butyl rubber** enclosures, double insulation
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Rubber handle for carriage
- Available with CEE receptacles IP44 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptades		
			32A		
			3P+N+E 	3P+E 	2P+E 
RE323P32N	Plug 400V 32A 5P IP44	RCBO 1P+N 32A Idn 0,03A			3 (IP44)

Dimensions: 450 x 83 x 130 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptades	Connectors
			16A 2P+E 	Socapex 19P 
RED6P16PN/SPX	Socapex male 19 pin	N.A.	6 (IP44)	1
RED6P16N/SPX	Socapex male 19 pin	N.A.	6 (IP44)	

Dimensions: 450 x 83 x 130 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E 	3P+E 	2P+E 
RE324P16N	Plug 230V 32A 3P 2 mt Cable H07RN-F 3G6	RCBO 1P+N 32A Idn 0,03A MCB 1P+N 16A			4 (IP44)

Dimensions: 450 x 83 x 130 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	Multi standard
			16A 2P+E 	16A 
RED6PSHN	Plug 230V 16A 3P 2 mt Cable H07RN-F 3G2,5	N.A.		6 (Italian – Schuko)

Dimensions: 450 x 83 x 130 mm (L x H x W)

Custom solutions available on demand





Series OMEGA

POWER DISTRIBUTION BOXES



Product features

- **Hard butyl rubber** enclosures, double insulation
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Rubber handle for carriage
- Available with CEE receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptacles		
			32A		
			3P+N+E	3P+E	2P+E
					
OM632P32N	CEE Inlet 400V 63A 5P IP67	RCD 4P 63A I _{dn} 0,03A MCB 4P 32A	2 (IP44)		
OM632PS32N	CEE Inlet 400V 63A 5P IP67	RCD 4P 63A I _{dn} 0,03A MCB 4P 32A	2 (IP67)		

Dimensions: 270 x 290 x 270 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E	3P+E	2P+E
					
OM326P16N	CEE Plug 400V 32A 5P IP44 2 mt Cable H07RN-F 5G6	RCD 4P 40A I _{dn} 0,03A MCB 1P+N 16A			6 (IP44)
OM326PS16N	CEE Plug 400V 32A 5P IP67 2 mt Cable H07RN-F 5G6	RCD 4P 40A I _{dn} 0,03A MCB 1P+N 16A			6 (IP67)

Dimensions: 270 x 290 x 270 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			63A		
			3P+N+E	3P+E	2P+E
					
OM633PS2263N	CEE Plug 400V 63A 5P IP67 1 mt Cable H07RN-F 5G16	RCD 4P 63A I _{dn} 0,03A MCB 1P+N 63A			3 (IP67)

Dimensions: 270 x 290 x 270 mm (L x H x W)

Custom solutions available on demand

Series DELTA / SIGMA

POWER DISTRIBUTION BOXES



Product features

- **Hard butyl rubber** enclosures, double insulation
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Rubber handle for carriage
- Available with CEE receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





SIGMA type

Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E	3P+E	2P+E
					
SI326P16N	CEE Plug 400V 32A 5P IP44 2 mt Cable H07RN-F 5G6	RCD 4P 40A I _{dn} 0,03A MCB 1P+N 16A			6 (IP44)

Dimensions: 215 x 340 x 130 mm (L x H x W)
Custom solutions available on demand



DELTA type

Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E	3P+E	2P+E
					
DE326PS16N/U*	CEE Plug 400V 32A 5P IP67 2 mt Cable H07RN-F 5G6	RCD 4P 40A I _{dn} 0,03A MCB 1P+N 16A			6 (IP67)

Dimensions: 260 x 380 x 150 mm (L x H x W)
* Cable entrance from the top
Custom solutions available on demand



DELTA type

Article	Supply	Protections	CEE P17 Receptacles		
			16A		
			3P+N+E	3P+E	2P+E
					
DE326PS16N	CEE Inlet 400V 32A 5P IP67	RCBO 1P+N 16A I _{dn} 0,03A			6 (IP67)

Dimensions: 260 x 380 x 150 mm (L x H x W)
Custom solutions available on demand



Product features

- **Hard butyl rubber** enclosures, double insulation
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Rubber handle for carriage
- Available with CEE receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Series H30

Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E 	32A 3P+N+E 	16A 2P+E 
H31258PSN	CEE Inlet 400V 125A 5P IP67	MCB 4P 125A Main RCBO 4P 63A Idn 0,03A RCBO 4P 32A Idn 0,03A RCBO 1P+N 16A Idn 0,03A	2 (IP67)	3 (IP67)	3 (IP67)

Dimensions: 400 x 560 x 275 mm (L x H x W)
Custom solutions available on demand



Series H10

Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E 	32A 3P+N+E 	63A 2P+E 
H1636PS2263N	CEE Inlet 400V 63A 5P IP67	MCB 4P 63A Main RCBO 2P 63A Idn 0,03A			6 (IP67)

Dimensions: 400 x 400 x 275 mm (L x H x W)
Custom solutions available on demand



Series H7

Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E 	32A 3P+N+E 	32A 2P+E 
H7636PS32N	CEE Inlet 400V 63A 5P IP67	MCB 4P 63A Main RCBO 1P+N 32A Idn 0,03A			6 (IP67)

Dimensions: 400 x 280 x 275 mm (L x H x W)
Custom solutions available on demand

Movable transformers



Product features

- Hard **butyl rubber** enclosures, double insulation, **IP65**
- Handles for transportation or lifting hooks
- Hinged transparent polycarbonate lid with closing spring to protect MCBs
- CEE P17 IP67 plug with 3 mts H07RN-F cable
- Outlets with receptacles CEE P17 IP67
- Outlets protected by miniature circuit breakers or fuses
- Built in compliance with Standards
CEI EN 61439-1 / CEI EN 61439-2
- Internal transformer built in compliance with Standards
CEI EN 61558-1, 61558-2-4, 61558-2-6





Series CM

Item	Transformer	Receptacles CEE P17						
		63A 3P+N+E 	32A 3P+N+E 	16A 2P+E 230V 	32A 2P 48V 	16A 2P 48V 	32A 2P 24V 	16A 2P 24V 
CM16KSPS	Safety single phase 6KVA 400/24-48V				3			3
CM112KSPS	Safety three phase 12KVA 400/24-48V				3			6
CM425KIPS	Insulation three phase 25KVA 400/400V		1					
CM545KIPS	Insulation three phase 45KVA 400/400V	1						

Note: further configurations available on demand

Dimensions **Series CM1:** 770 x 760 x 640 mm (L x H x P)

Dimensions **Series CM4:** 970 x 860 x 850 mm (H x W x D)



Series H30

Item	Transformer	Receptacles CEE P17				
		16A 2P+E 230V 	32A 2P 48V 	16A 2P 48V 	32A 2P 24V 	16A 2P 24V 
H3M500SPS42	Safety three phase 5KVA 400/24-48V			3		3
H3M500SPS48	Safety single phase 5KVA 230/48V		3			
H3M400IPS23	Insulation single phase 4KVA 400/230V	1				

Note: further configurations available on demand

Dimensions: 560 x 400 x 275 mm (L x H x P)



Series H10

Item	Transformer	Receptacles CEE P17				
		16A 2P+E 230V 	32A 2P 48V 	16A 2P 48V 	32A 2P 24V 	16A 2P 24V 
H1M300SPS48	Safety single phase 3000VA 230/48V		4			
H1M300SPS42	Safety single phase 3000VA 230/24-48V			2		2
H1M250SPS24	Safety single phase 2500VA 230/24V					6
H1M300IPS23	Monofase di isolamento 3000VA 400/230V	1				

Note: further configurations available on demand

Dimensions: 400 x 400 x 275 mm (L x H x P)

Movable transformers



Series H7

Item	Transformer	Receptacles CEE P17				
		16A 2P+E 230V 	32A 2P 48V 	16A 2P 48V 	32A 2P 24V 	16A 2P 24V 
H7M250SPS24	Safety single phase 2500VA 230/24V					6
H7M250SPS42	Safety single phase 2500VA 400/24-48V			2		2
H7M200SPS42	Safety single phase 2000VA 230/24-48V		1			2
H7M200IPS23	Insulation single phase 2000VA 400/230V	1				

Note: further configurations available on demand

Dimensions: 280 x 400 x 275 mm (L x H x P)



Series OMEGA

Item	Transformer	Receptacles CEE P17				
		16A 2P+E 230V 	32A 2P 48V 	16A 2P 48V 	32A 2P 24V 	16A 2P 24V 
OM150SPS24	Safety single phase 1500VA 400/24V					4
OM150SPS48	Safety single phase 1500VA 230/48V			4		
OM150IPS	Insulation single phase 1500VA 400/230V	1 + MAG.				
OM100SPS42	Safety single phase 1000VA 230/48-24V			1		1

Note: further configurations available on demand

Dimensions: 290 x 270 x 270 mm (L x H x P)



Series BETA

Item	Transformer	Receptacles CEE P17				
		16A 2P+E 230V 	32A 2P 48V 	16A 2P 48V 	32A 2P 24V 	16A 2P 24V 
BEM50SPS48	Safety single phase 500VA 230/48V			2		2
BEM50SPS42	Safety single phase 500VA 230/24V-48V			1		2
BEM50SPS24	Safety single phase 500VA 230/24V					2
BEM25SPS24	Safety single phase 250VA 230/24V					2

Note: further configurations available on demand

Dimensions: 225 x 235 x 235 mm (L x H x P)



The Modulus series

Gimax has recently enriched its range of rubber panels, always distinctive material of the company, with a new range of products in technopolymer (polyethylene) self-extinguishing compound (Glow wire test 960°C). The new material represents a valid alternative to rubber for industrial use. For example, we can suggest the use of the Modulus series in following areas:

- Television and film production
- Construction sites
- Shipyards
- Industrial Maintenance
- Defence
- Civil protection

The environments listed above are characterized by the temporary use of the power distros. In these realities, the Modulus series is particularly appreciated for its intrinsic qualities, such as stackability, lightness and easy transportability thanks to the practical handles placed at the sides of the structure allowing an easy carriage.

The available range also allows to realize the most complex configurations in terms of typology and number of receptacles.

Obviously all Gimax products are manufactured in compliance with international safety Standards responding to the needs of extreme robustness and durability even in environments characterized by heavy uses. The typical lightness of technopolymers

combined with Gimax quality makes the Modulus series an ideal partner to successfully deal with work problems in any kind of environment.



TECHNICAL FEATURES

Compliance of Modulus series made of LLDP

- Glow wire test 960° C according to the following standards
EN60695-2-11: 2013, EN60695-2-10: 2013,
CEI IEC60695-2-11: 2014, CEI IEC60695-2-10: 2014.
- Test report n. 1236.0CI0030/18 carried out in
Accredia Laboratory n. 0086
- Ral 9001
- IP65
- Shock resistant (IK10)
- Weight of the empty enclosures
(Excl. Front-back panels and accessories):
Modulus S 7.50 Kg,
Modulus M 12.00 Kg,
Modulus L 14.00 Kg
- Front and back panels made of PVC with V0
self-extinguishing grade according to UL94
- Custom solutions available on demand



STACKABILITY



POWERLOCK OUTLETS



SOCAPEX OUTLETS



INTEGRATED HANDLE

SIDE SHOCKS PROTECTION



Series MODULUS S

POWER DISTRIBUTION BOXES



Product features

- High density polyethylene enclosure, light and resistant to harsh use and shocks in compliance with Glow wire test 960° C according to EN60695-2-11: 2013, EN60695-2-10: 2013, CEI IEC60695-2-11: 2014, CEI IEC60695-2-10: 2014
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Available with CEE P17 receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Integrated carriage handles
- Stackability
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**



Optional skate with wheels

Art. SKATES





Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E	32A 3P+N+E	16A 2P+E
H3L6312P16N	CEE Inlet 400V 63A 5P IP67	RCBO 4P 63A I _{dn} 0,03A Main MCB 1P+N 16A			12 (IP44)
H3L6312P16N1		Model with RCD 4P 63A I _{dn} 0,03A Main MCB 1P+N 16A			

Dimensions: 560 x 380 x 350 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E	32A 3P+N+E	32A 2P+E
H3L636P32N	CEE Inlet 400V 63A 5P IP67	RCD 4P 63A I _{dn} 0,03A Main MCB 1P+N 32A			6 (IP44)

Dimensions: 560 x 380 x 350 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E	32A 3P+N+E	32A 2P+E
H3L1252PS63N	CEE Inlet 400V 125A 5P IP67	MCB 4P 125A Main RCBO 4P 63A I _{dn} 0,3A	2 (IP67)		

Dimensions: 560 x 380 x 350 mm (L x H x W)
Custom solutions available on demand

Series MODULUS M

POWER DISTRIBUTION BOXES



Product features

- High density polyethylene enclosure, light and resistant to harsh use and shocks in compliance with Glow wire test 960° C according to EN60695-2-11: 2013, EN60695-2-10: 2013, CEI IEC60695-2-11: 2014, CEI IEC60695-2-10: 2014
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Available with CEE P17 receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Integrated carriage handles
- Stackability
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**



Optional skate with wheels
Art. SKATEM





Article	Supply	Protections	CEE P17 Receptacles	
			Socapex 19P 	16A 2P+E 
H4L6315P16N/SPX	CEE Inlet 400V 63A 5P IP67	MCB 4P 63A Main RCBO 1P+N 16A Idn 0,03A	3	12 (IP44)

Dimensions: 560 x 560 x 400 mm (L x H x W) with PVC panels
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
			32A 3P+N+E 	32A 2P+E 
H4L12515P32N	CEE Inlet 400V 125A 5P IP67	MCB 4P 125A Main RCBO 4P 32A Idn 0,03A RCBO 1P+N 32A Idn 0,03A	3 (IP44)	12 (IP44)

Dimensions: 560 x 560 x 400 mm (L x H x W) with PVC panels
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
			63A 3P+N+E 	32A 3P+N+E 
H4L12516PVN	CEE Inlet 400V 125A 5P IP67	MCB 4P 125A Main RCBO 4P 63A Idn 0,03A	1 (IP67)	3 (IP44)
		RCBO 4P 32A Idn 0,03A	32A 2P+E 	16A 2P+E 
		RCBO 1P+N 32A Idn 0,03A RCBO 1P+N 16A Idn 0,03A Emergency stop	3 (IP44)	9 (IP44)

Dimensions: 560 x 560 x 400 mm (L x H x W) with PVC panels
Custom solutions available on demand

Series MODULUS L

POWER DISTRIBUTION BOXES



Product features

- High density polyethylene enclosure, light and resistant to harsh use and shocks in compliance with Glow wire test 960° C according to EN60695-2-11: 2013, EN60695-2-10: 2013, CEI IEC60695-2-11: 2014, CEI IEC60695-2-10: 2014
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Available with CEE P17 receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Emergency stop
- Integrated carriage handles
- Carrying skate with wheels
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptacles	
HFLR25012PN	Connectors POWERLOCK 400A IP67	MCB 4P 250A Main RCBO 4P 63A I _{dn} 0,03A RCBO 4P 32A I _{dn} 0,03A RCBO 1P+N 32A I _{dn} 0,03A	63A 3P+N+E 	32A 3P+N+E 
			3 (IP67)	3 (IP44)
			32A 2P+E 	
			6 (IP44)	

Dimensions: 560 x 1250 x 500 mm (L x H x W) with PVC panels
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
HFLR2506PS63PN	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 250A Main RCBO 4P 63A I _{dn} 0,03A	63A 3P+N+E 	
			6 (IP67)	

Dimensions: 560 x 1250 x 500 mm (L x H x W) with PVC panels
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
HFLR40014PPN	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 400A Main RCBO 4P 125A I _{dn} 0,03A RCBO 4P 63A I _{dn} 0,03A RCBO 4P 32A I _{dn} 0,03A RCBO 1P+N 16A I _{dn} 0,03A	125A 3P+N+E 	63A 3P+N+E 
			2 (IP67)	3 (IP67)
			32A 3P+N+E 	16A 2P+E 
			3 (IP44)	6 (IP44)

Dimensions: 560 x 1250 x 500 mm (L x H x W) with PVC panels
Custom solutions available on demand

Series MODULUS XL

POWER DISTRIBUTION BOXES



Product features

- High density polyethylene enclosure, light and resistant to harsh use and shocks in compliance with Glow wire test 960° C according to EN60695-2-11: 2013, EN60695-2-10: 2013, CEI IEC60695-2-11: 2014, CEI IEC60695-2-10: 2014
- Transparent polycarbonate hinged lid with closing spring to protect the MCBs
- Available with CEE P17 receptacles IP44, IP67 black color and/or Socapex connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Emergency stop
- Metal frame black color
- Forklift pockets
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptacles		
			125A 3P+N+E	63A 3P+N+E	32A 3P+N+E
HFLM25012PN	Connectors POWERLOCK 400A IP67	MCB 4P 250A Main			
		RCBO 4P 125A ldn 0,03A	1 (IP67)	2 (IP67)	3 (IP44)
		RCBO 4P 63A ldn 0,03A			
		RCBO 4P 32A ldn 0,03A			
		RCBO 1P+N 32A ldn 0,03A	32A 2P+E 	16A 2P+E 	
		RCBO 1P+N 16A ldn 0,03A	3 (IP44)	3 (IP44)	

Dimensions: 560 x 1250 x 500 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		Connectors
			125A 3P+N+E	63A 3P+N+E	Socapex 19P
HFLM40018PPN/SPX	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 400A Main			
		RCBO 4P 125A ldn 0,03A	2 (IP67)	4 (IP67)	3
		RCBO 4P 63A ldn 0,03A			
		RCBO 4P 32A ldn 0,03A			
		RCBO 1P+N 32A ldn 0,03A	32A 3P+N+E 	16A 2P+E 	
		RCBO 1P+N 16A ldn 0,03A	3 (IP44)	6 (IP44)	

Dimensions: 1200 x 1250 x 500 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
			63A 3P+N+E	32A 3P+N+E
HFLM40015PPN	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 400A Main		
		RCBO 4P 63A ldn 0,03A	6 (IP67)	3 (IP44)
		RCBO 4P 32A ldn 0,03A		
		RCBO 1P+N 32A ldn 0,03A	32A 2P+E 	16A 2P+E
		RCBO 1P+N 16A ldn 0,03A	3 (IP44)	3 (IP44)

Dimensions: 1200 x 1250 x 500 mm (L x H x W)
Custom solutions available on demand

Series FLG /FLC

POWER DISTRIBUTION BOXES



Product features

- Flightcase in naval plywood 10mm with protected aluminium edges.
- Rubber revolving wheels, metal folding handles.
- N. 2 opening covers with butterfly locks
- Transparent polycarbonate hinged lids with closing spring to protect the MCBs
- Available with CEE P17 receptacles IP44, IP67 black color and/or with Socapex multichannel connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Multimeters or remote emergency button available on demand
- Series FLC (panels made of PVC) **IP32**
- Series FLG (**rubber enclosures**) **IP65**
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Article	Supply	Protections	CEE P17 Receptacles		
			32A 3P+N+E 	16A 3P+N+E 	32A 2P+E 
FLG6310PSN	CEE Inlet 400V 63A 5P IP67	MCB 4P 63A Main RCBO 4P 32A ldn 0,03A RCBO 1P+N 32A ldn 0,03A RCBO 1P+N 16A ldn 0,03A	1 (IP67)	2 (IP67)	3 (IP67)
			16A 2P+E 		
			4 (IP67)		

Dimensions: 460 x 755 x 580 mm (L x H x W)
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles		Connectors
FLG1259P/SPX	CEE Inlet 400V 125A 5P IP67	MCB 4P 125A Main RCBO 4P 63A ldn 0,03A RCBO 4P 32A ldn 0,03A RCBO 1P+N 16A ldn 0,03A	125A 3P+N+E 	63A 3P+N+E 	Socapex 19P 
			1 (IP67) through wiring	2 (IP67)	3
			32A 3P+N+E 		
			3 (IP67)		

Dimensions: 440 x 1000 x 550 mm (L x H x W)
Custom solutions available on demand

Serie FLG /FLC

POWER DISTRIBUTION BOXES



Article	Supply	Protections	CEE P17 Receptacles		
			63A 3P+N+E 	32A 3P+N+E 	16A 2P+E 
FLG16011PN	Connectors POWERLOCK 400A IP67	MCB 4P 160A Main RCBO 4P 63A ldn 0,03A RCBO 4P 32A ldn 0,03A RCBO 1P+N 16A ldn 0,03A	2 (IP67) 	3 (IP67) 	6 (IP67) 

Dimensions: 440 x 1000 x 550 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
			63A 3P+N+E 	32A 3P+N+E 
FLG25011	Connectors POWERLOCK 400A IP67	MCB 4P 250A Main RCBO 4P 63A ldn 0,03A RCBO 4P 32A ldn 0,03A RCBO 1P+N 32A ldn 0,03A RCBO 1P+N 16A ldn 0,03A	2 (IP67) 	3 (IP67) 
			32A 2P+E 	16A 2P+E 
			3 (IP67) 	3 (IP67) 

Dimensions: 440 x 1000 x 550 mm (L x H x W)

Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles
FLG4009PS63N	Connectors POWERLOCK 400A IP67	MCB 4P 400A Main RCBO 4P 63A I _{dn} 0,03A	63A 3P+N+E 
			9 (IP67)

Dimensions: 600 x 1000 x 560 mm (L x H x W) with PVC panels
Custom solutions available on demand



Article	Supply	Protections	CEE P17 Receptacles	
FLC40012PN/P	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 400A Main RCBO 4P 63A I _{dn} 0,3A RCBO 1P+N 32A I _{dn} 0,3A RCBO 1P+N 16A I _{dn} 0,03A	63A 3P+N+E 	32A 3P+N+E 
			9 (IP67)	3 (IP44)

Dimensions: 530 x 1400 x 620 mm (L x H x W) with PVC panels
Custom solutions available on demand



Product features

- Trolley with metal frame thickness 20/10 mm with PVC panels (thickness 10 mm)
- Lifting hooks
- Rubber revolving wheels.
- Transparent polycarbonate hinged lids with closing spring to protect the MCBs
- Available with CEE P17 receptacles IP44, IP67 black color and/or with Socapex multichannel connectors
- Receptacles protected with MCB, RCD and/or RCBO
- LED indicator lights
- Custom solutions available on demand
- Built in compliance with **CEI EN 61439-1 / CEI EN 61439-2**





Series CM1

Article	Supply	Protections	CEE P17 Receptacles		
			125A 3P+N+E 	63A 3P+N+E 	32A 3P+N+E 
CM14006PSN/P	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 250A Main RCBO 4P 63A I _{dn} 0,3A		6 (IP67)	

Dimensions: 760 x 770 x 640 mm (L x H x W)
Custom solutions available on demand



Series CM4

Article	Supply	Protections	CEE P17 Receptacles		
			125A 3P+N+E 	63A 3P+N+E 	32A 3P+N+E 
CM4009PSN	Connectors POWERLOCK 400A IP67	MCB 4P 400A Main RCBO 4P 63A I _{dn} 0,3A		9 (IP67)	

Dimensions: 860 x 970 x 850 mm (L x H x W)
Custom solutions available on demand



Series CM4

Article	Supply	Protections	CEE P17 Receptacles		
			125A 3P+N+E 	63A 3P+N+E 	32A 3P+N+E 
CM440010PSN/P	Connectors POWERLOCK 400A IP67 POWERLOCK 400A IP67 (through wiring)	MCB 4P 400A Main RCBO 4P 100A I _{dn} 0,3A			
		RCBO 4P 100A I _{dn} 0,3A	2 (IP67)	3 (IP67)	3 (IP67)
		RCBO 4P 63A I _{dn} 0,3A			
		RCBO 4P 32A I _{dn} 0,03A	125A 2P+E 		
		RCBO 2P 100A I _{dn} 0,3A	1 (IP67)		

Dimensions: 860 x 970 x 850 mm (L x H x W)
Custom solutions available on demand

Temporary distribution

CABLE REELS



Product features

- Drum in hard **butyl rubber**, double insulation
- Very resistant metal painted frame with handle for transportation
- Stop knob on the drum
- Outlets: CEE P17 receptacles **IP44** or **IP67** protected by thermal switch
- Inlet: CEE P17 plug **IP44** or **IP67** and neoprene cable type H07 RN-F
- Built in compliance with Standards **CEI EN 61316**
- **Further versions suitable for 24V - 48V (very low voltage) available**





Series MAXI

Item	Cable type in outfit H07RN-F	Protections	Receptacles CEE P17				
			32A		16A		
			3P+N+E 	3P+E 	3P+N+E 	3P+E 	2P+E 
MX1623503PS	50mt sez. 3G2,5mmq plug CEE P17 2P+E 230V 16A	Thermal switch 1P 16A					3
MX1623502PS	50mt sez. 3G2,5mmq plug CEE P17 2P+E 230V 16A	Thermal switch 1P 16A					2
MX1640502PS	50mt sez. 4G2,5mmq plug CEE P17 3P+E 400V 16A	Thermal switch 3P 16A				2	
MX16405011PS	50mt sez. 5G2,5mmq plug CEE P17 3P+N+E 400V 16A	Thermal switch 3P 16A				1	1

Note: further configurations available on demand

Dimensions: 400 x 320 x 260 mm (H x W x D)



Series MINI

Item	Cable type in outfit H07RN-F	Protections	Receptacles CEE P17				
			32A		16A		
			3P+N+E 	3P+E 	3P+N+E 	3P+E 	2P+E 
MN1623252PS	25mt sez. 3G2,5mmq plug CEE P17 2P+E 230V 16A	Thermal switch 1P 16A					2
MN1623402PS	40mt sez. 3G2,5mmq plug CEE P17 2P+E 230V 16A	Thermal switch 1P 16A					2
MN1640302PS	30mt sez. 4G2,5mmq plug CEE P17 3P+E 400V 16A	Thermal switch 3P 16A				2	
MN16402511PS	25mt sez. 5G2,5mmq plug CEE P17 3P+N+E 400V 16A	Thermal switch 3P 16A				1	1

Note: further configurations available on demand

Dimensions: 380 x 300 x 220 mm (H x W x D)



Series MXC

Item	Cable type in outfit H07RN-F	Protections	Receptacles CEE P17				
			32A		16A		
			3P+N+E 	3P+E 	3P+N+E 	3P+E 	2P+E 
MXC3240251PS	25mt sez. 5G6mmq plug CEE P17 3P+N+E 400V 32A	Thermal switch 3P 16A	1				
MXC1640403PS	40mt sez. 5G2,5mmq plug CEE P17 3P+N+E 400V 16A	N. 3 Thermal switch 1P 16A					3

Note: further configurations available on demand

Dimensions: 960 x 400 x 440 mm (H x W x D)

permalec

MATERIAL ELECTRICO INDUSTRIAL



PERMALEC INDUSTRIAS, S.L.

San Dalmacio, 20

28021 MADRID

Tel. 917 960 152 - info@permalec.com

Soluciones móviles de distribución eléctrica e iluminación LED para aplicaciones industriales y zonas ATEX

permalec.com